



OFIX VP

THE ANALYSER THAT
HANDLES TREATMENT TOO



FULL WATER ANALYSIS

Ofix VP provides a real-time analysis of your water's core quality criteria, giving you total peace of mind. Keep an eye on the water pH, RedOx levels, and temperature so you can adjust it whenever you need to.



COMPACT AND UNIVERSAL

The Ofix VP analyser is installed directly onto the 50mm pipe in your technical room. Simply cut out 20cm of pipe and install the full water treatment analyser. You don't even have to worry about compatibility with your pool cover.



AN ADAPTABLE SOLUTION

By connecting the Ofix VP to your Daisy VP dosing pumps, your analyser can become a genuine automatic water treatment tool. In this way, you can enjoy smart management of your pH regulation and your chlorine pump/regulator.



SAY GOODBYE TO YOUR TESTING STRIPS AND ENJOY YOUR POOL!

No more time spent dipping a test strip into your pool every week when you could be enjoying the water. With OfixVP, you have real-time temperature, pH, and RedOx information at a glance.

Fine-tune your treatment and avoid any chlorine and pH regulator over-doses – you're guaranteed to save money throughout the season!




SWITCH FROM ANALYSER TO AUTOMATIC TREATMENT

By combining your Daisy VP dosing pumps to your smart analyser, you can transform your monitoring system into a full water treatment installation.

The two dosing pumps, connected wirelessly to your Ofix VP, use the information measured by the analyser to treat your pool water.

Two slots have been left open for injectors running directly into the Ofix VP, so you don't need to modify your piping! Installation is quick and simple.

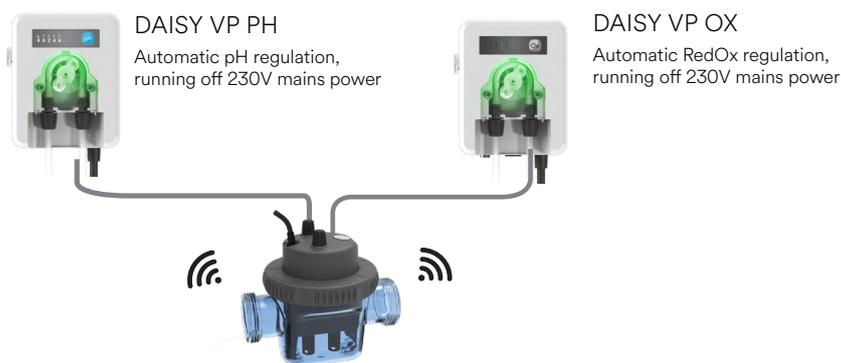

POOL-COVER COMPATIBLE



PROTECTED FROM THE ELEMENTS (RAIN, ALGAE)



DOES NOT ENCUMBER YOUR POOL

VIGIPOOL : A TECHNICAL ROOM ON YOUR PHONE

Vigipool is the new smartphone app that lets you control your technical room from the palm of your hand. Using this app, you can centralise the devices in your technical room and manage your Wi-Fi connected tools wherever you are in the world. With Vigipool, you can access the various measurements provided by your Ofix VP and enjoy real-time access to your technical room. Track your measurements, view your user recommendations, and configure your pH and RedOx regulation devices using the Vigipool app.

AN ADAPTABLE SOLUTION:

For even greater functionality, add Vigipool-compatible devices to your technical room and enjoy even more functions on your app (filter management, LED projectors, etc.).



Reference	Model	Alim.	pH meas.	RedOx meas.	Injector locations	Max pool vol.	Connection	Analyser dimensions	Installation	Probe
PF10J070	Ofix VP	230V AC	5 à 10 +/- 0.1	200 - 900 mV +/- 20mV	1 pH injector 1 chlorine injector	150 m ³	Wi-Fi (local and remote) / Bluetooth®	185 x 120 x 50 mm	Ø50 mm	Platinum
PF10J071	Ofix VP Gold									Gold

Reference	Model	Alim.	Max injection volume	Max pump flow	Max pool vol.	Connection	Panel dimensions
PF10J053	Daisy VP pH	230V AC	18 litres / day Adjustable	1.5 l/h	150 m ³	Wifi à Ofix VP	130 x 115 x 35 mm
PF10J054	Daisy VP Ox						



Broschüre nicht einfach wegwerfen, in Mülltonne entsorgen.

eu.ccei-pool.com